

Condenser Microphones

TUBE CONDENSER MICROPHONE T-1&T-47

Vacuum Tube Condenser Microphone

- Professional, large-diaphragm, tube condenser microphone for unsurpassed audio quality
- Hand-selected 12AX7 vacuum tube for exceptional warmth and vintage sound
- Ideal as main and support microphone for studio and live applications
- Cardioid pickup pattern for outstanding sound source separation and feedback rejection
- Pressure-gradient transducer with shock-mounted capsule
- Perfect for vocals and acoustic instruments
- Switchable low-frequency roll-off
- 20 dB input attenuation (T-1 only)
- External power supply with 30 ft. (10 m) multi-core cable included
- Heavy-duty suspension mount, windscreen and aluminum transport case included
- Ultra-rugged construction with metal die-cast body
- High-quality components and exceptionally rugged construction ensure long life
- Conceived and designed by BEHRINGER Germany

behringer.com



The Ultimate Recording Mic?

Since the early days of recording, sound engineers have been searching for the best-sounding mics for recording acoustic instruments and the human voice. The resounding choice of professional recordists around the globe has been the tube condenser microphone. Why? Because nothing compares to the sound captured by a good tube condenser microphone — so open, warm and full of character.

But tube mics can wipe out a home-recording budget faster than you can say “phantom power supply.” That’s why we’re so very proud to present


our new T-1 and T-47 microphones.

These mics exemplify our commitment to quality and value — now anyone who can afford a decent live microphone can have a studio-grade, tube-powered condenser mic for about the same price.

Classic Tube Sound

The sound of tubes is undeniably rich and smooth. At the heart of each of these mics is a hand-selected 12AX7 tube, which has been specifically designed to give these microphones their incredible sonic character. One advantage tube condensers have over their solid-state

Continued on next page

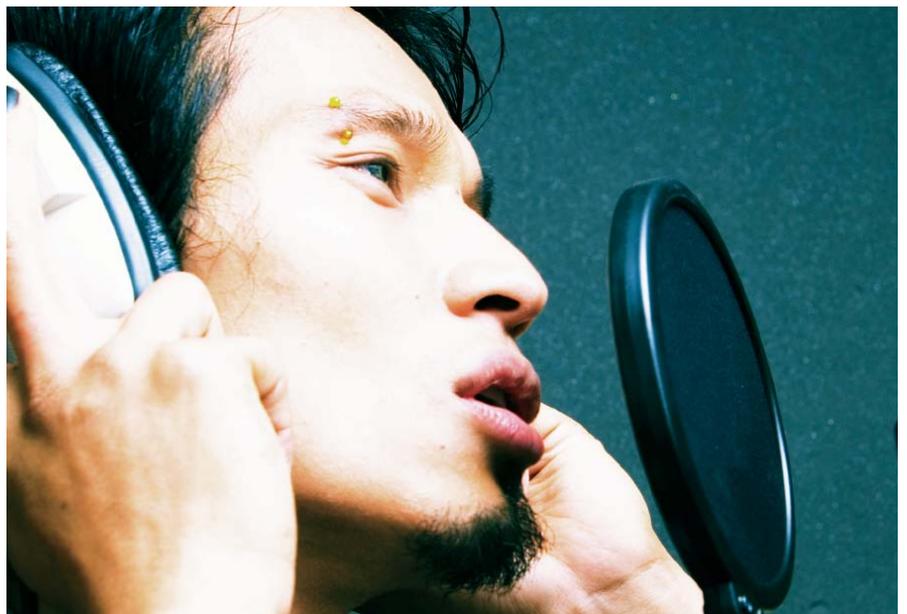

TUBE CONDENSER MICROPHONE T-1&T-47

counterparts is they are not subject to the rapid rise of odd-order harmonics, which the ear perceives as highly unmusical. Even when subjected to high sound pressure levels, the T-1 and T-47 mics react in much the same way the human ear does.

T-1 and T-47 Have a Sensitive Side

Another advantage is that tube mics typically outperform transistor designs when it comes to subtle signal levels, such as environmental ambience. The T-1 and T-47 pick up every nuance of your performance, capturing an openly transparent slice of time and space — with just the right amount of tube warmth. Now you'll be able to justify that new set of strings for your acoustic guitar (because you'll hear the difference), and you'll marvel at the sparkling highlights coming off your wind chimes.

But I Need a Good Kick-Drum Mic

While these mics can handle input levels as high as 130 dB, the T-1 comes equipped with a switchable -20 dB pad for the extremely high transients generated by kick-drums, heavy-metal vocalists and mortar launchers. With its 20 Hz to 20 kHz frequency range, the T-1 can handle all the low-frequency content you can throw at it, and still provide all the definition your sound source deserves.

Cardioid Polar Pattern

Both of these mics feature a tight cardioid (heart-shaped) pattern, which reduces the pickup of sound from the sides and rear for improved source isolation. The included custom shock mount fits all standard microphone stands and provides further isolation from external sources of vibration, such as sounds transmitted through floor joists, outside traffic, etc.



Dedicated Power Supply

The included BEHRINGER PSU-T provides the supply voltage for the tube preamplifier and houses a LOW CUT switch that can be used to reduce the low frequency response, if so desired. The included 7-pin multi-core cable supplies power to the mic and routes the audio signal to the XLR socket on the PSU-T.


Value

When it comes to value, BEHRINGER has always been an industry leader. The T-1 and T-47 tube condenser microphones take that legacy to the next level, providing studio-grade quality at incredibly

consumer-friendly pricing. These great sounding mics are so affordable, you'll want one for main your vocals, one for backup vocals, another for the bass rig, another for...

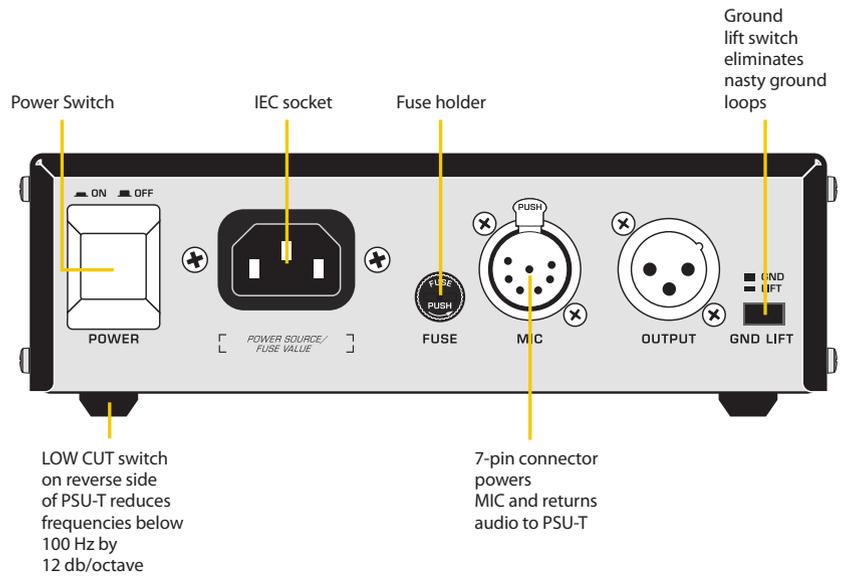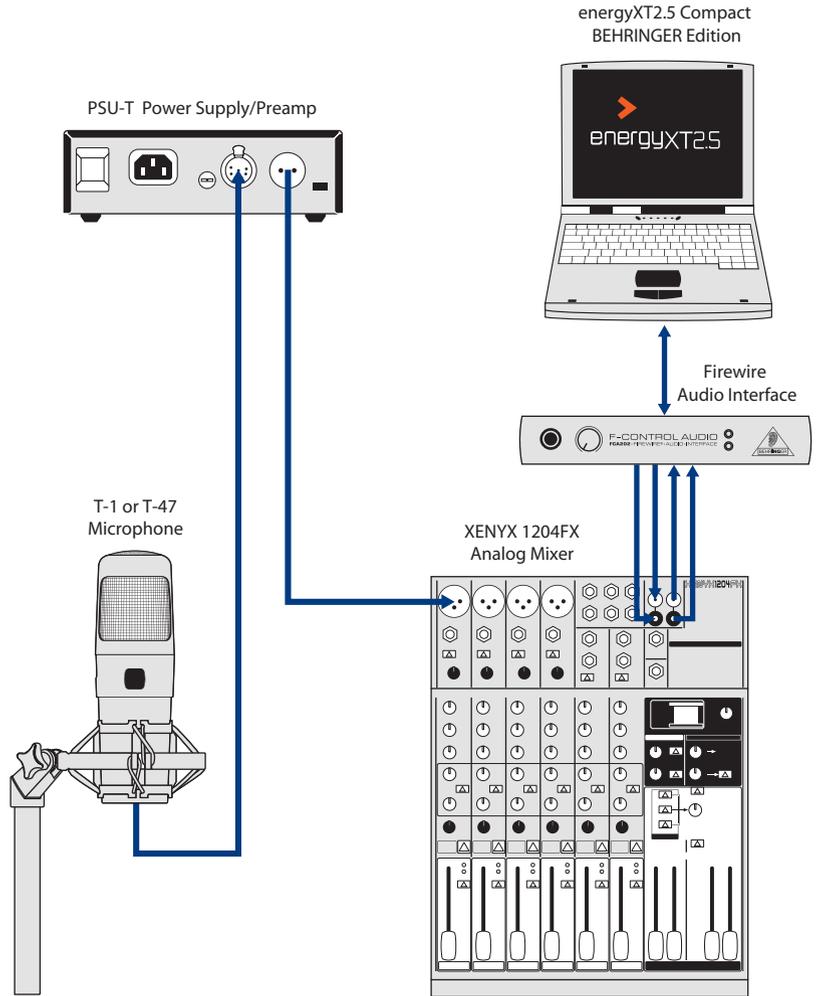

TUBE CONDENSER MICROPHONE T-1&T-47

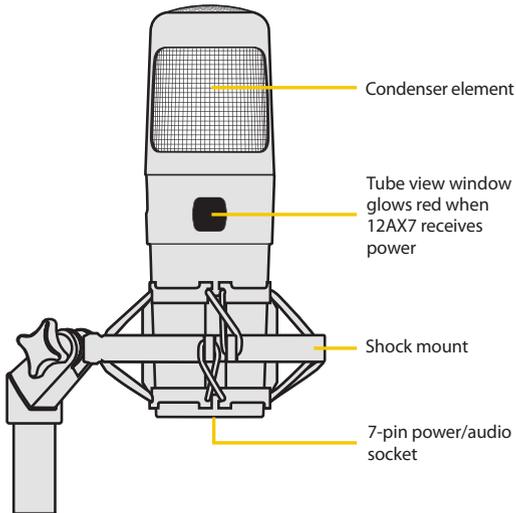

Specifications

Transducer type	condenser, 0.63" / 16 mm
Polar pattern	cardioid
Preamplifier	vacuum tube (12AX7)
Output (PSU-T)	gold-plated balanced XLR connector
Open circuit sensitivity	-40 dBV (0 dBV = 1 V/Pa)
Frequency response	20 Hz to 20 kHz
Level attenuation	-20 dB, switchable (T-1 only)
Low-cut filter	12 dB/oct. @ 100 Hz (switchable)
Max. SPL (3 % THD @ 1 kHz)	130 dB
Dynamic range	110 dB
Nominal impedance	approx. 200 Ω
Load impedance	>1 k Ω
Supply voltage adapter	BEHRINGER PSU-T

MAINS VOLTAGE / FUSE

100-120 V~, 50/60 Hz	T 250 mA H 250 V
220-230 V~, 50/60 Hz	T 125 mA H 250 V
Mains connector	standard IEC receptacle
Dimensions	diameter: 2.7", length: 8.3", diameter: 68 mm, length: 211 mm
Weight (net)	1.7 lbs / 0.77 kg

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may differ from those listed or illustrated.

For service, support or more information contact the BEHRINGER location nearest you:

Europe Tel.: +49 2154 9206 4149, Fax: +49 2154 9206 4199
USA/Canada Tel.: 1 425 672 0816, Fax: +1 425 673 7647
Singapore Tel.: +65 5845 1800, Fax: +65 6214 0275

Australia Tel.: +61 3 9877 7170, Fax: +61 3 9877 7870
Japan Tel.: +81 3 5281 1180, Fax: +81 3 5281 1181



©2010 Red Chip Company Ltd. Technical specifications and appearance subject to change without notice. The information contained herein is correct at the time of printing. BEHRINGER accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph or statement contained herein. 985-10000-00355

behringer.com